


KF100

Synthetic flat filter cell for fan coils with U-section galvanised steel support frame and double electrowelded galvanised wire mesh that supports the filter fabric in AT100 series thermobonded synthetic polyester staple fibre with a basis weight of 100 gr/m2 and a thickness of 5-10 mm.

TECHNICAL SPECIFICATIONS AND USAGE LIMIT					
EFFICIENCY class (EN ISO 16890)	Group ISO COARSE (ePM1 = 4% - ePM2,5 = 13% - ePM10 = 49%)				
EFFICIENCY class (CEN EN779-2012)	G2				
AVERAGE gravimetric efficiency:	70%				
FILTER FABRIC basic weight:	100gr/mq				
THICKNESS	10 mm				
MAXIMUM WORKING temperature	100°C				
RELATIVE humidity	100%				
INITIAL pressure drop	21 Pa				
RECOMMENDED final pressure drop	250 Pa				
MAXIMUM pressure drop	400 Pa				
DUST collection capacity	180 gr/mq				
RECOMMENDED frontal air speed	1,5 m/s				
FIRE reaction	class F1 - (DIN53438/3)				
	class M1 - NF-F-16-101				

Pressure Drops

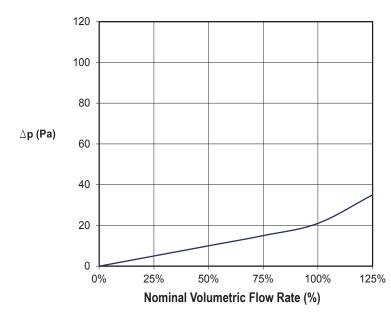

SELECTION CHART					
Thickness [mm]	Width [mm]	Length [mm]			
3-5-6-8-10	MIN 100 MAX 230	MIN 100 MAX 1600			

PRESSURE DROP DIAGRAM

(Air Temperature 20°C)

Diagram

Pressure drop determining curve with a clean filter (Dp) based on percentage change in the flow rate or nominal speed.



FILTERING MEDIA

The calibrated-density synthetic fibre with high operating efficiency is made up of AT100 series thermobonded polyester staple fibre with a basis weight of 100 gr/m2 and a thickness of 5-10 mm.

APPLICATIONS

Fan coils, air treatment units.

PRODUCT DISPOSAL

Dispose of the product by separating the metal part from the filtering part. The CER code for disposal of the metal part is 120101. The CER code for disposal of the filtering part is 150202.

GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica contribute to obtain the credits of the major international rating systems for sustainable buildings:



Contributes to credits: IP, EA, MR



Contributes to credits: MATERIALS, COMMUNITY



BREEAM

Contributes to credits: MAN, WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS						
		REACH	RoHS		*	*
Residential	Easy Pack	REACH Certificate	RoHS Certificate	Building	Air conditioning	CMV

*On request

