




Soft Pocket 25TF

Soft synthetic pocket filter with U-section galvanised steel frame and filter bags in 200 g/m² polyester fibre with progressive density on the air outlet side. Efficiency class M5.

TECHNICAL SPECIFICATIONS AND USAGE LIMIT

EFFICIENCY class (EN ISO 16890:2016)	Group ISO ePM10 60%
EFFICIENCY class (CEN EN779-2012)	M5
AVERAGE gravimetric efficiency:	96%
FILTER FABRIC basic weight:	200gr/mq
THICKNESS:	10-12 mm
MAXIMUM WORKING temperature:	100°C
RELATIVE humidity:	100%
INITIAL pressure drop:	58 Pa
RECOMMENDED final pressure drop:	250 Pa
MAXIMUM pressure drop:	400 Pa
DUST ACCUMULATION capacity:	730 gr/mq
RECOMMENDED frontal air speed:	1,5 m/s
FIRE reaction	class F1 - (DIN53438/3)
	class B2 - (DIN4102/1)
	class M1 - NF-F-16-101

Pressure Drops

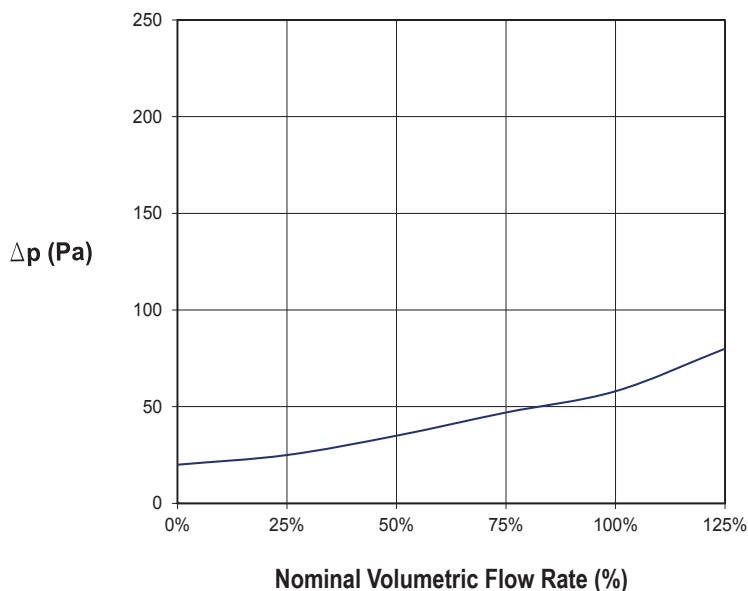

SELECTION CHART

Model [code]	Dimensions W x D x H [mm]	Pockets [n]	Nominal Flow Rate [m ²]	Filtering Surface [m ² /h]
25TF/4.290.5	290 x 595 x 500	4	3.150	2,6
25TF/6.490.5	490 x 595 x 500	6	5.050	4,0
25TF/7.595.5	595 x 595 x 500	7	5.900	4,7
25TF/4.290.6	290 x 595 x 600	4	4.050	3,2
25TF/6.490.6	490 x 595 x 600	6	6.000	4,8
25TF/7.595.6	595 x 595 x 600	7	7.100	5,6

PRESSURE DROP DIAGRAM (Air temperature 20°C)

Diagram

Pressure drop determining curve with a clean filter (Dp) based on percentage change in the flow rate or nominal speed.

FILTERING MEDIA

The filtering media is composed of polyester fibre with progressive density on the air outlet side. The chemical physical nature of the fibres and the separators welded to the inside of each bag ensure low pressure drops, maximum accumulation capacity and a larger filtering surface.

APPLICATIONS

Filtration in air treatment units of civil buildings and in painting plants. Prefiltration of high-efficiency filters.

PRODUCT DISPOSAL

Dispose of the product by separating the metal part from the filtering part. The CER code for disposal of the metal part is 120101. The CER code for disposal of the filtering part is 150202.

GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica contribute to obtain the credits of the major international rating systems for sustainable buildings:



LEED

Contributes to credits:
IP, EA, MR



WELL

Contributes to credits:
AIR, MATERIALS, COMMUNITY

BREEAM®

BREEAM

Contributes to credits:
MAN, WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS

OEM	Residential	Easy Pack	REACH Certificate	RoHS Certificate	Industry	Building	Air conditioning	CMV

*On request