


# **Pannel-Pleat 17PP**

Filter panel with high-resistance moulded polypropylene structure and pleated filter panel in polypropylene fibres with progressive density. Efficiency class F7.

High dirt retention capacity.

TECHNICAL SPECIFICATIONS AND USAGE LIMIT						
EFFICIENCY class (EN ISO 16890:2016)	Group ISO ePM2,5 65%					
EFFICIENCY class (CEN EN779-2012)	F7					
AVERAGE colorimetric efficiency:	80-90%					
MAXIMUM WORKING temperature:	60°C					
INITIAL pressure drop:	122 Pa					
	3.400 m3/h					
NOMINAL flow rate:	panel size 592x592x98					
	frontal air speed 2,7 m/s					
	average filtering speed 0,13 m/s					
RECOMMENDED final pressure drop:	300 Pa					
FIRE reaction:	class F1 - (DIN53438/3)					

### **Pressure Drops**

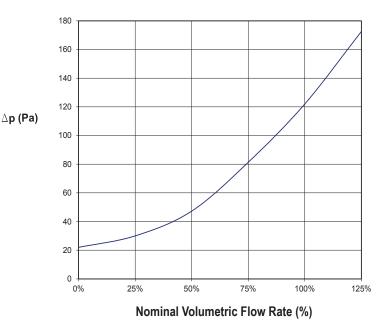

SELECTION CHART								
Model [code]	Dimensions W x D x H [mm]	Nominal Flow Rate [m³/h]	Filtering Surface [m²]					
PP/172998	292 X 592 X 98	1.700	3,6					
PP/174998	492 X 592 X 98	2.850	6,1					
PP/175998	592 X 592 X 98	3.400	7,3					
PP/172948	292 X 592 X 48	1.530	3,3					
PP/174948	492 X 592 X 48	2.300	4,9					
PP/175948	592 X 592 X 48	3.100	6,6					

The material can be supplied in a thickness of 23mm and 145mm. This model can be supplied with a plastic frame complete with flange.

# **PRESSURE DROP DIAGRAM** (Air temperature 20°C)

Pressure drop determining curve with a clean filter (Dp) based on percentage change in the flow rate or nominal speed.



## **FILTERING MEDIA**

Model Pannel Pleat PP

The pleated filter panel is composed of polypropylene fibres with progressive density and the pleats are uniformly spaced out with thermoplastic separators.

#### **APPLICATIONS**

Filtration in air treatment units, filtration in painting plants, prefiltration of absolute filters.

### **PRODUCT DISPOSAL**

As the product is entirely made of plastic, it can be disposed of in one single solution. The CER code for disposal is 150202.

# GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica contribute to obtain the credits of the major international rating systems for sustainable buildings:



Contributes to credits: IP, EA, MR, IN



Contributes to credits:
AIR, MATERIALS, COMMUNITY



**BREEAM**Contributes to credits:
MAN. WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS								
			REACH	RoHS	ſμ		*	*
OEM	Residential	Easy Pack	REACH Certificate	RoHS Certificate	Industry	Building	Air conditioning	CMV

\*On request

